

TRAVELLER

3700WB




BS II/III
compliant


FORCE
12 
FREE SERVICES
3 LACS / 3 YEARS
UNMATCHED WARRANTY

SALIENT FEATURES

- ▶▶ Originally designed and produced by Mercedes Benz AG Germany as T1 Transporter, it is now manufactured in India by Force Motors as the Traveller.
- ▶▶ Monocoque body structure provides total safety and car like ride quality. Cathodic Electrodeposition of primer coat ensures superior corrosion protection and enhances paint gloss retention.
- ▶▶ Interiors are roomy and elegant. High roof version offers clear standing height enabling easy internal movement.
- ▶▶ NVH re-engineered to deliver significant reduction in noise, vibrations & harshness in the passenger area.
- ▶▶ Ideally suitable for Inter & Intra City Travel.
- ▶▶ A good investment for Tours & Travels, Corporates, Airlines, Contractors etc.
- ▶▶ Greater safety on account of improved four piston front disc brakes and larger dia drum brakes in the rear.
- ▶▶ **OPTIONAL FITMENTS :**
 - Air Conditioning
 - Power Steering
 - Jack Knife Door (16+D Seating Configuration)




Wider Wind screen for better visibility



All Forward Facing Standard Seats (17 + D)



All Forward Facing High Back Seats (17+D)
Clear Standup Height of 6 feet.

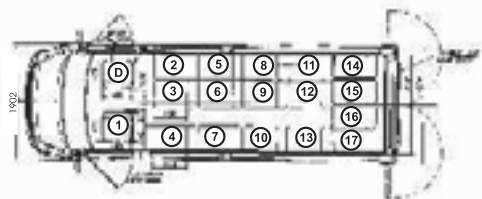

FORCE MOTORS LIMITED

Mumbai Pune Road, Akurdi, Pune - 411 035

Visit us at : www.forcemotors.com

Toll Free No. : 1800-2333-000

Authorised Dealer :

TECHNICAL SPECIFICATIONS

ENGINE

Model	: TD 2650 FTI TD-2650 FTI BS3 ED
Type	: 4-Cylinder, DI, TCIC
Emission Compliance	: BS-II, BS-III
Displacement	: 2596 cc
Max. Output	: 76HP @ 3200 rpm / 82HP @ 3200 rpm
Max. Torque	: 195 Nm @ 1800-2000 rpm / 215 Nm @ 1800-2000 rpm

TRANSMISSION

Type	: Synchromesh
No. of Gears	: 5 Forward & 1 Reverse (5th gear - overdrive)

AXLES

Front	: Dead Rigid - I-Beam (Reverse Elliot type)
Rear	: Live Rigid

SUSPENSION

Front	: Semi Elliptical Leaf spring with hydraulic telescopic shock absorbers & Anti roll bar
Rear	: Semi Elliptical Leaf spring with hydraulic telescopic shock absorbers

STEERING

Type	: Mechanical / Power (Optional)
Turning Radius	: 6.5 metres

BRAKES

Service Brakes	: Hydraulic - Dual circuit (Vacuum Assisted)
Front	: Four piston, Ventilated disc brake with wear indicator
Rear	: Drum brakes
Parking Brake	: Mechanical on rear wheels

WHEELS & TYRES

Size	: 215 / 80 R 14 / 215 / 75 R 15
------	------------------------------------

DIMENSIONS (mm)

Wheel Base	: 3700
Overall Length	: 6065
Overall Width	: 1975
Overall Height	: 2550
Overhang front	: 900
Overhang Rear	: 1465
Ground Clearance	: 210
Fuel Tank Capacity	: 70 Litres

WEIGHTS (kg.)

Max. Permissible FAW	: 1600
Max. Permissible RAW	: 2210
Max. Permissible GVW	: 3810

SEATING CAPACITY : 17 + D

NOTE : On account of continuous Research and Development, specifications are subject to change.
The data included herein is to be regarded as approximate.
Accessories shown may not necessarily be part of standard equipment.